

HITEX TECHNOLOGIES
Creating Intelligence

Temperature Monitoring System and Data Loggers



**Blood Bank, Hospital, Laboratory
Clinical Trial Units, Pharmacy
Food Storage**

ABOUT US



HITEX TECHNOLOGIES
Creating Intelligence

Established in the year 2001, we, 'Hitex Technologies', are an eminent organization, involved in manufacturing and supplying Electronic Software System.

Our range consists of Metric Instruments, Control Instruments, Temperature Monitoring Systems, Data Loggers, Universal Monitoring System we also provide custom solutions as per customer requirements etc .

All our products are manufactured by a team of qualified professionals using excellent quality



Wireless Temperature Monitoring System:

- Data Recording Facility, total Readings which can be stored in the instrument: 10000 records for 16 channel.
- 20 x 4 LCD Display
- 8 to 32 Sensors Channels can be connected.
- Logging interval, 1 min to 120 min.
- Over/Under Range Buzzer and LED Indicator.
- Auto Dialing/SMS Facility for Above/Below Limit Detection. (Optional).
- 8 mobile numbers can be stored.
- 4 mobile numbers can be assigned to each channel
- Alarm remind via SMS / Voice Call
- RS232 serial Communication for PC,
- Pt100 Sensors. Temperature Range is -100°C to +100°C (-200°C optional)
- 0.1 °C Temperature resolution, 1°C accuracy
- Operating voltage: 230VAC
- Dimension: H:350 x W:295 x D:110mm
- Excel Report can be generated via software.

Wireless Temperature Sensor Module

- Temperature measurement
- RTD (Pt100) Sensor probe
- Temperature Range -100°C to +100°C (Optional temperature range -200°C to +100°C)
- 0.1 °C Temperature resolution, 1°C accuracy
- 6 Digit 7 segment Display with touch keys
- Over/Under Range Buzzer and LED Indicator.
- Operating voltage: 230VAC
- Dimension: H:80 x W:140 x D:60mm



Wireless sensor module controller for Temperature Monitoring System
Required for battery operated sensor module



HITEX TECHNOLOGIES
Creating Intelligence



Wireless Temperature Monitoring System:

- Touch Screen 10 inches Display
- Data Recording Facility, total Readings which can be stored in the instrument: Unlimited (lifetime)
- Logging interval, 1 min to 120 min.
- 8 to 128 Sensors Channels can be connected.
- Over/Under Range Buzzer and LED Indicator.
- Alarm delay can be set for each channel 0 to 120 min
- Auto Dialing/SMS Facility for Above/Below Limit Detection. (Optional).
- 32 mobile numbers can be stored.
- 4 mobile numbers can be assigned to each channel
- Alarm remind via SMS / Voice Call
- Ethernet/LAN Communication for PC,
- Pt100 Sensors. Temperature Range is -100°C to +100°C (-200°C optional)
- 0.1 °C Temperature resolution, 1°C accuracy
- Operating voltage: 230VAC
- PDF Report can be generated from any computer connected to LAN.
- On screen Graph Display for each channels.

Wireless Range extender for Multi rooms, Multi storey building



Wireless Temperature & Humidity Sensor Module


- Temperature & Humidity measurement
- 6 Digit 7 segment Display with touch keys
- Over/Under Range Buzzer and LED Indicator.
- Temperature Range 0°C to 70°C
- 0.1 °C Temperature resolution, 1°C accuracy
- Humidity range 5%Rh to 95%Rh
- Operating voltage: 230VAC
- Dimension: H:80 x W:140 x D:60mm



Wireless Temperature Sensor Module

- Temperature measurement
- RTD (Pt100) Sensor probe
- Temperature Range -100°C to +100°C
(Optional temperature range -200°C to +100°C)
- 0.1 °C Temperature resolution, 1°C accuracy
- Battery operated, battery life 3 years

Wireless Wall Mount display
for Temperature Monitoring System:

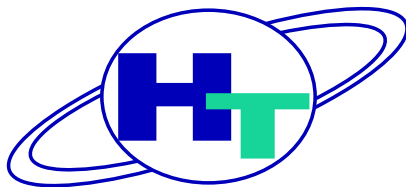

HITEX TECHNOLOGIES
Creating Intelligence

Second Floor, C wing, Shatabdi, Khedekar Ind. Estate, S.No. 38/1,
Narhe Gaon Road, Narhe, Pune - 411041, Maharashtra, India.
Ph.: +91-9890283815,
Email: htp051@gmail.com / sales@hitex.co
web: www.hitex.co